


# Kabelverschraubungen / Cable Glands

**we**ge® M Classic flach / flat

<b>Material</b>	Messing vernickelt
<b>Dichteinsatz</b>	TPE
<b>Druckring</b>	Stahl verzinkt
<b>Schutzklasse</b>	IP54
<b>Temperaturbereich</b>	-40 °C bis +100 °C

<b>material</b>	brass nickel-plated
<b>sealing insert</b>	TPE
<b>washer</b>	steel zinc plated
<b>protection class</b>	IP54
<b>range of temperature</b>	-40 °C to +100 °C

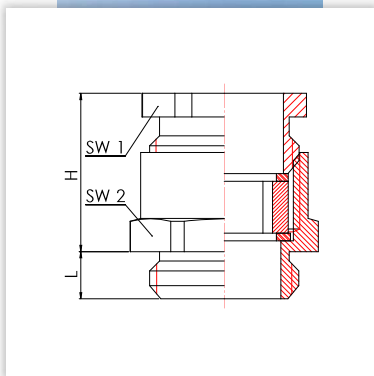

Gewinde thread	Kabel/cable		SW1	SW2	H	L		Bestell-Nr. ref.-number
	Stärke/ thickness	Breite/ breadth						

## kurzes Anschlussgewinde / short connection thread

M 20 x 1,5	1 – 5	3 – 16	22	24	20	6	50	110.2016.5
M 25 x 1,5	3 – 8	9 – 20	28	30	22	7	50	110.2521.5
M 32 x 1,5	4 – 11	11 – 27	37	39	25	8	50	110.3229.5
M 40 x 1,5	4 – 11	24 – 34	47	50	30	8	20	110.4036.5
M 50 x 1,5	5 – 12	29 – 44	54	57	34	9	5	110.5042.5
M 63 x 1,5	5 – 12	34 – 50	60	66	36	10	5	110.6348.5

Pg 16	1 – 5	3 – 16	22	24	20	6,5	50	110.1600.5
Pg 21	3 – 8	9 – 20	28	30	22	7	50	110.2100.5
Pg 29	4 – 11	11 – 27	37	40	25	8	50	110.2900.5
Pg 36	4 – 11	24 – 34	47	50	29	9	20	110.3600.5
Pg 42	5 – 12	29 – 44	54	57	33	10	5	110.4200.5
Pg 48	5 – 12	34 – 50	60	64	36	10	5	110.4800.5