

Kabelverschraubungen / Cable Glands


wege® M Classic BZE / Strain relief

Material	Messing vernickelt	material	brass nickel-plated
Schrauben	Edelstahl	screws	stainless steel
Dichtring	① NR/NBR ② CR/EPDM	sealing ring	① NR/NBR ② CR/EPDM
Schutzklasse	IP54	protection class	IP54
Temperaturbereich	① -40 °C bis +90 °C ② -30 °C bis +120 °C	range of temperature	① -40 °C to +90 °C ② -30 °C to +120 °C

Gewinde thread		Dichtring sealing ring	SW1	SW2	D	H	L		Bestell-Nr. ref.-number
-------------------	---	---------------------------	-----	-----	---	---	---	---	----------------------------

kurzes Anschlussgewinde / short connection thread											
M 16 x 1,5	6	- 10	UNI	②	17	18	22	29	5	50	182.1600.7
M 20 x 1,5	7,5	- 11,5	UNI	①	20	22	26	31	6	50	180.2011.6
M 20 x 1,5	9	- 13,5	UNI	①	22	22	29	32	6	50	180.2013.6
M 20 x 1,5	8,5	- 13,5	UNI	②	22	22	29	32	6	50	182.2000.7
M 20 x 1,5	10	- 15	UNI	①	24	24	32	34	6	50	180.2016.6
M 25 x 1,5	14	- 20	UNI	②	30	27	38	37	7	25	182.2500.7
M 32 x 1,5	16	- 25	UNI	②	36	34	45	41	8	10	180.3200.7

Pg 9	6	- 10	UNI	①	17	17	22	29	6	50	180.0900.6
Pg 11	7,5	- 11,5	UNI	①	20	20	26	31	6	50	180.1100.6
Pg 13,5	9	- 13,5	UNI	①	22	22	29	32	6,5	50	180.1300.6
Pg 16	10	- 15	UNI	①	24	24	32	34	6,5	50	180.1600.6
Pg 21	14	- 20	UNI	①	30	30	38	37	7	25	180.2100.6
Pg 29	18	- 27	UNI	①	41	40	50	43	8	10	180.2900.6

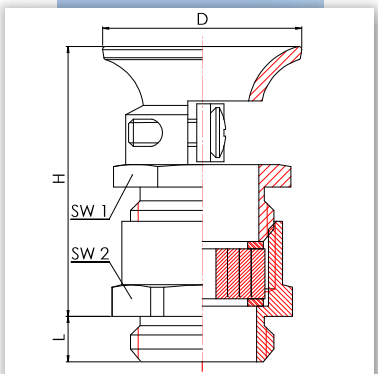

i Einseitige Zugentlastung mit Biegeschutz

i One-sided strain relief with bend protection